


COMM

KING

KY 97A

Connector

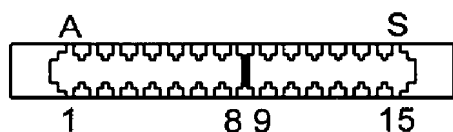

Circuit	Pin #	Notes
+ 14 VDC DIMMER.....	B	
13.75 VDC POWER IN.....	14	Note 1
13.75 VDC POWER IN.....	R	Note 1
4 OHM AUDIO HIGH.....	E	
4 OHM AUDIO LO.....	5	
500 OHM AUDIO OUT.....	H	
AGC TEST/REMOTE CHAN INC.....	L	
AUX AUDIO IN 1.....	D	
AUX AUDIO IN 2.....	C	
AUX AUDIO IN 3.....	3	
AUX AUDIO IN LO.....	4	
DET AUDIO OUT.....	2	
DIM SELECT.....	A	Note 2
INTERCOM MIC AUDIO.....	K	
LIGHTING LO.....	1	
MIC AUDIO.....	J	
MIC KEY.....	9	
POWER GROUND.....	15	Note 3
POWER GROUND.....	6	Note 3
POWER GROUND.....	F	Note 3
POWER GROUND.....	S	Note 3
REMOTE XFR.....	12	
SHIELD AUDIO.....	7	

(Continued)

For familiarization only. Consult the manufacturers current data.

(KY 97A Continued)

SHIELD MIC	8	
SQ TEST & COMPRESSION TEST.....	10	
SWITCHED POWER.....	11	Note 4
SWITCHED POWER.....	13	Note 4
SWITCHED POWER.....	M	Note 4
SWITCHED POWER.....	P	Note 4
XMIT REC INTERLOCK.....	N	

Notes

1. Jumper 14 to R.
2. For 14 volts, A open, for 28 volts, A to ground, for half brightness A to power.
3. Jumper 15, 6, F, & S.
4. Jumper 11, 13, M & P

For familiarization only. Consult the manufacturers current data.